




C O N N E C T

FDA Compliant (FDA CFR 177.2600)
Silicone Sleeves

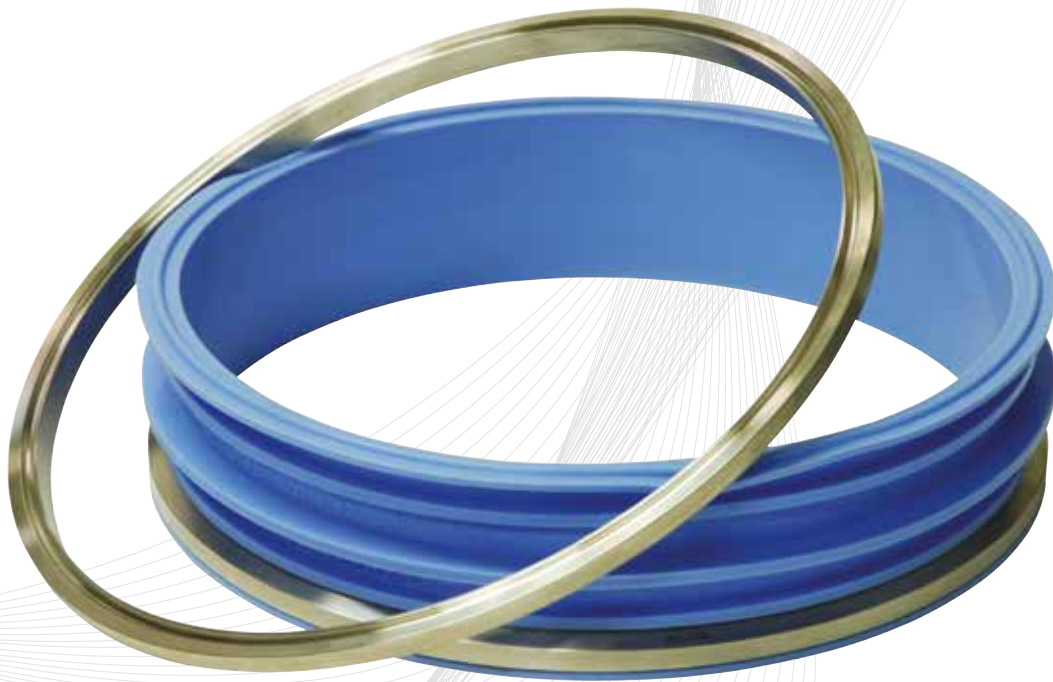

**Dust - Tight
Powder Transfer
Solutions**

hanningfield




A one-piece Tri-Clover compatible seal moulded from FDA compliant silicone

The **Uni-Connect** system is ideal for connecting two items of process equipment using Tri-Clover type couplings.


The use of the flexible connector provides a simple, effective method of height adjustment and also allows for misalignment.

The flexible sleeve is moulded in a one piece from FDA compliant pure silicone rubber. The silicone material complies with FDA CFR 177.2600 and is translucent.

The dust tight connection is ideal for material transfer and can be used to dampen any vibration problems.

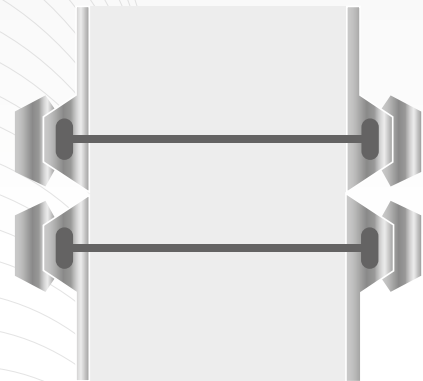


Smooth bore Uni-Connect Joint

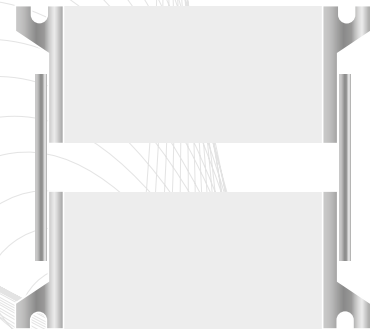

Normal 'stepped' sleeve joint

Uni-Connect Assembly

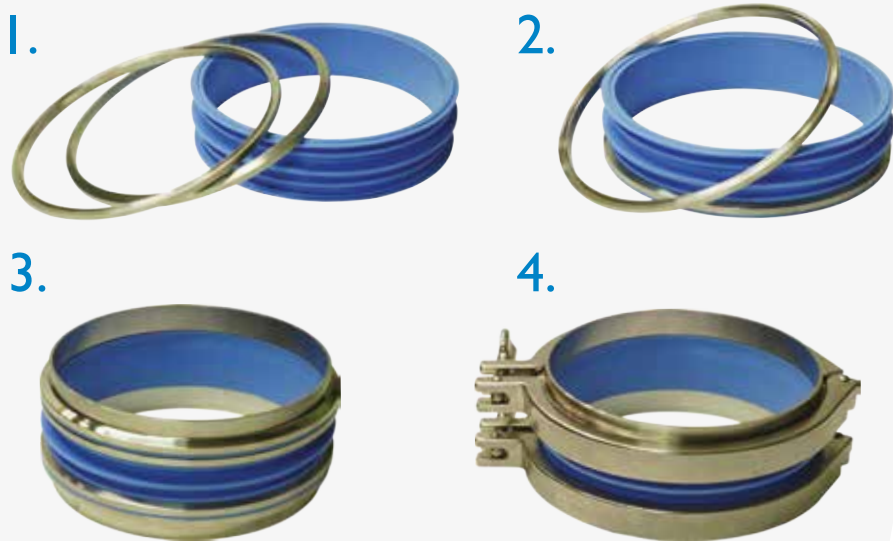

Diameter	Length
2"	40mm
4"	40mm
6"	50mm
8"	50mm
10"	60mm
12"	70mm

Flexible Tri-Cover Connecting Sleeves


The Uni-Connect provides simple, low-cost high adjustment and easy separation between fixed pipework.

- Dust tight connection
- FDA compliant silicone
- Flexibility for misalignment
- Hygienic one-piece moulding
- Easily disassembled and cleaned

Size Range

2" - 4" - 6" - 8" - 10" - 12"

Method of Assembly

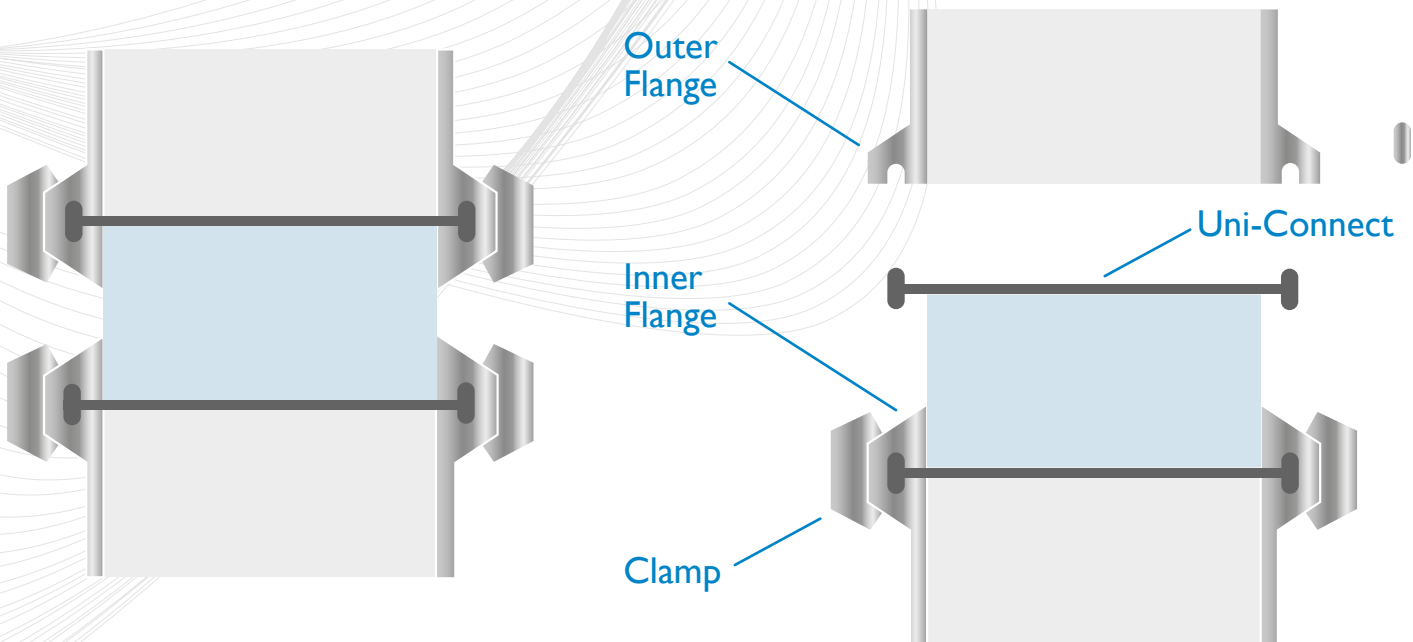



Uni-Connect Lite


A supplementary range of silicone connector sleeves with lengths up to 200mm.

Uni-Connect Lite also offers increased flexibility over the standard Uni-Connect system.

Custom lengths can also be supplied on request, subject to quantity.



Uni-Connect Sleeve

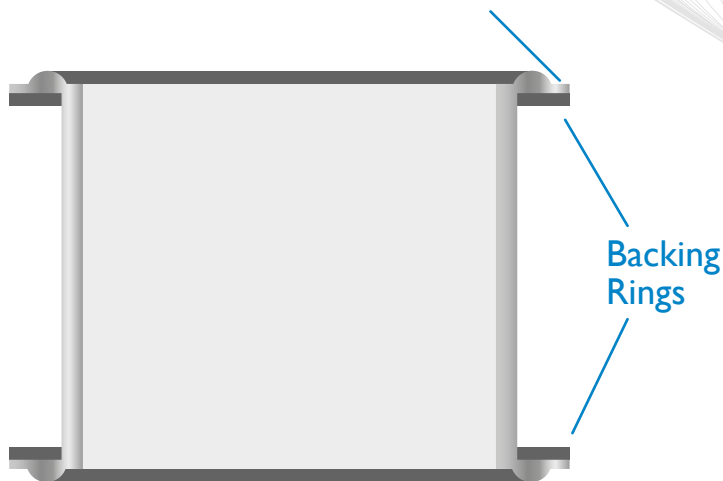






Backing Rings

Lightweight stainless steel backing rings are included with each sleeve, making assembly a simple operation.

The 4", 6" and 8" sleeves are available in 2 length options.

Diameter	Length 1	Length 2
4"	70mm	150mm
6"	100mm	200mm
8"	70mm	200mm
10"	100mm	

-  Dust tight connection
-  FDA compliant silicone
-  Flexibility for misalignment
-  Hygienic one-piece moulding
-  Includes super-light backing rings

Local Representative

Contact Details:

UK and Worldwide (Headquarters):
 Hanningfield Process Systems Ltd
 17 Millhead Way, Rochford, Essex, SS4 1LB, United Kingdom
 T: +44 (0) 1702 549 777
 E: info@hanningfield.com

USA, Canada and Puerto Rico:
 Hanningfield (North America)
 PO Box 1178, Hillsborough, North Carolina, 27278, USA
 T: +1 (919) 338 2884
 E: northamerica@hanningfield.com

Australasia and South East Asia:
 Hanningfield (Pacific)
 PO Box 362, Kenmore, Qld 4069, Australia
 T: +61 (0) 488 242158
 E: pacific@hanningfield.com